

Full Full F



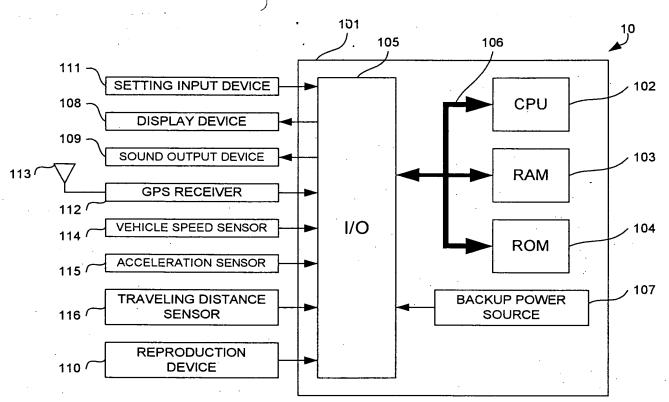

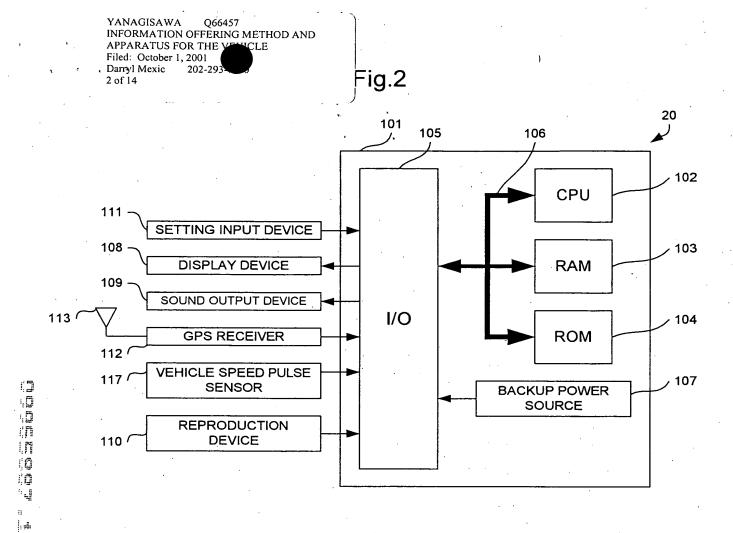

į. 🚣

, 📥

Fig.3


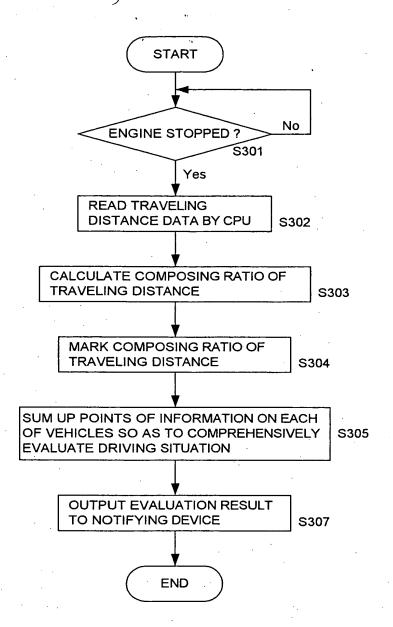



Fig.4

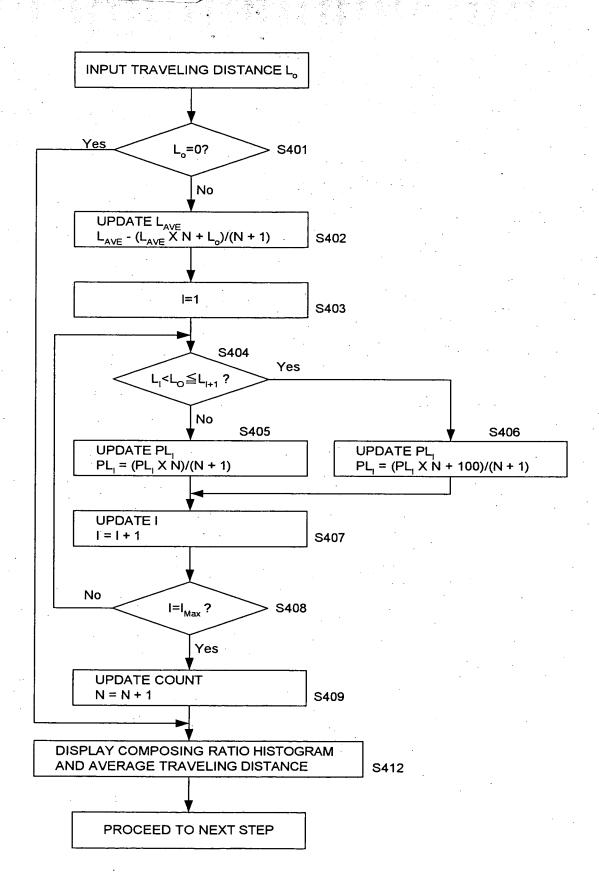

1.3

. 4


Fig.5

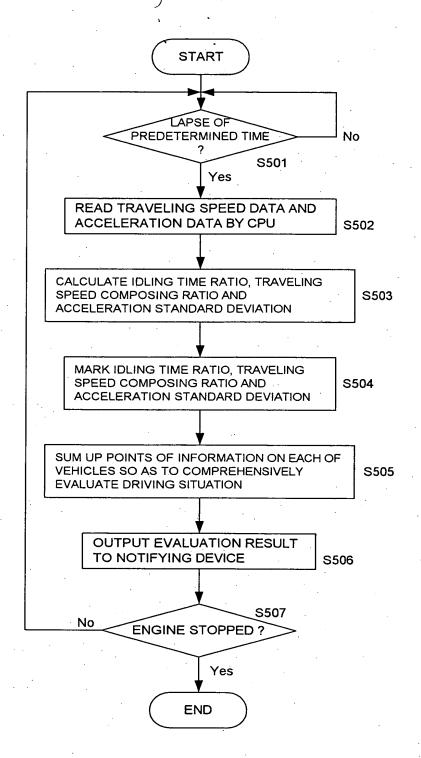

In Io


ļŌ

7 -

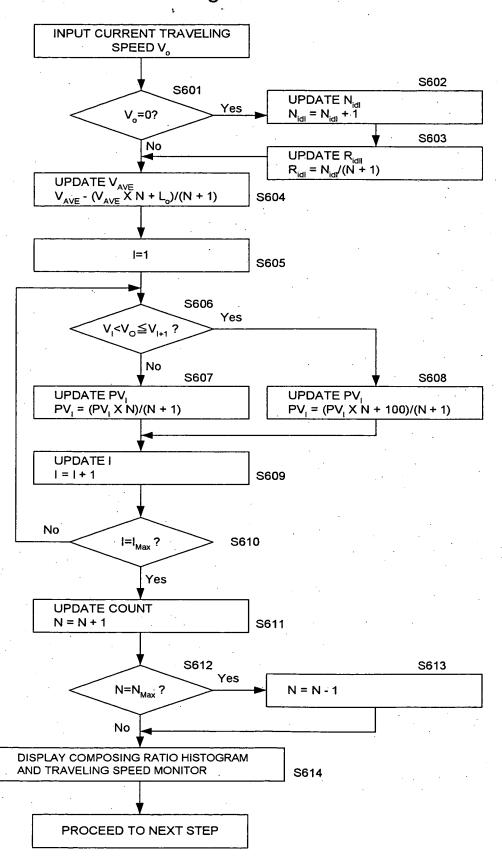

7 of 14

ig.7

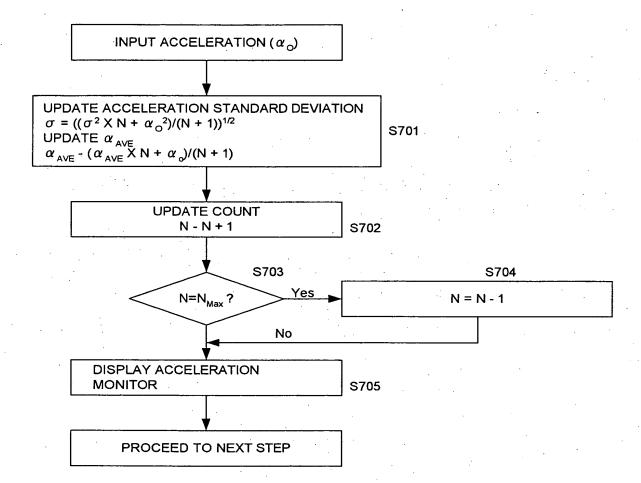

(0 (0

٤.

YANAGISAWA

ίħ

ľĠ

ė

ij

. 4

Q66457


YANAGISAWA Q66457 INFORMATION OFFERING METHOD AND APPARATUS FOR THE VEHICLE October 1, 2001 Mexic 202-293-7060

Fig. 10

TRAVEL DISTANCE

TOTAL AVERAGE = 6.7km

AVERAGE OF RECENT 50 TIMES = 1.1km

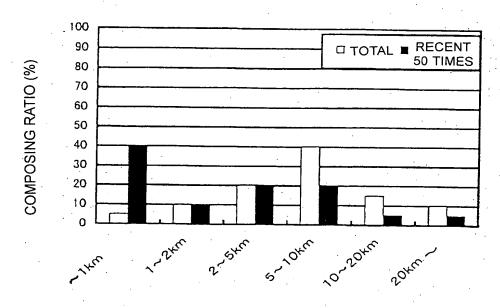


PARAMETER OF TRAVEL DISTANCE (km)

YANAGISAWA INFORMATION OFFERING METHOD AND AFRATUS FOR THE VEHICLE October 1, 2001 Mexic "202-293-7060

Fig. 11

TRAVELING SPEED

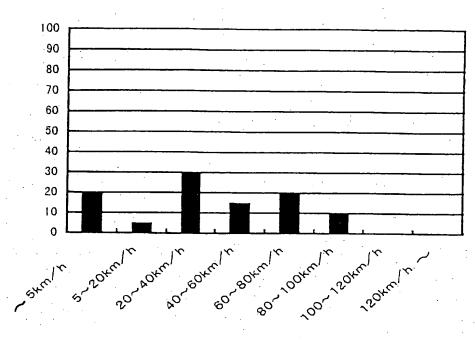

COMPOSING RATIO (%)


PARAMETER OF TRAVELING SPEED (km/h)

YANAGISAWA Q66457
INFORMATION OFFERING METHOD AND APPARATUS FOR THE VEHICLE

October 1, 2001
Mexic 202-293-7060

Fig. 12

SCREEN OF TRAVELING SPEED MONITOR

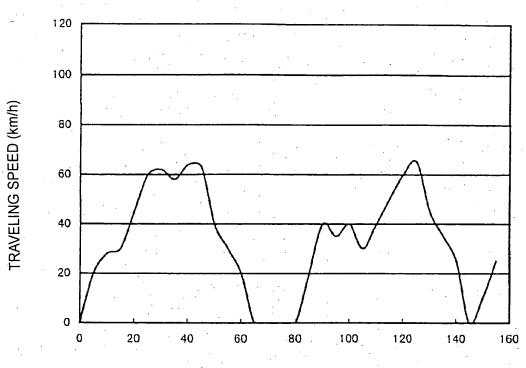


LAPSE OF TIME AFTER STARTING DRIVE (Min)

YANAGISAWA Q66457 INFORMATION OFFERING METHOD AND APPARATUS FOR THE VEHICLE Fittor Ctober 1, 2001 Diexic 202-293-7060

Fig. 13

SCREEN OF ACCELERATION MONITOR (2m/s² OR MORE; FAST START / SUDDEN BRAKE)

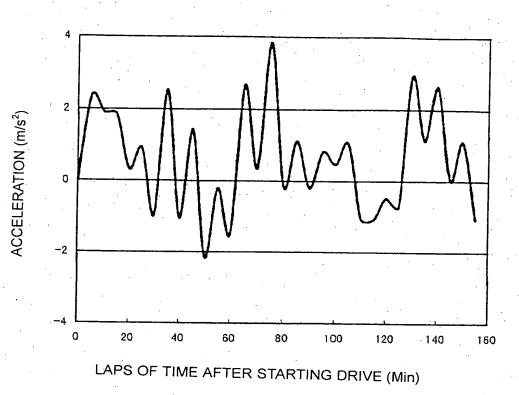

0

ļħ ļ0

Ü

1: ¢-1

Fig.14

